

SL-A-062B

Details

Material:	PC	
Process:	Vacuum Aluminum Plating	
Diameter:	62mm	
Heigh:	30.6mm	
Matched Holder:	Shinland's series B holders	
Matched Cover:	SL-062-LENS-A 、SL-062-MIX-LENS-A	
Matched Lens:	SL-A-062B-LENS	
ROHS Compliant:	YES	
Status:	Ready	

Optical Properties

Code	Typ. Angle	Typ. efficiency
SL-A-062B-S	15°~17°	83%
SL-A-062B-M	20°~25°	83%
SL-A-062B-L	32°~38°	83%

Photo




Matched LED type






Dimensional Figure


Measure Unit : mm SL-A-062B-S

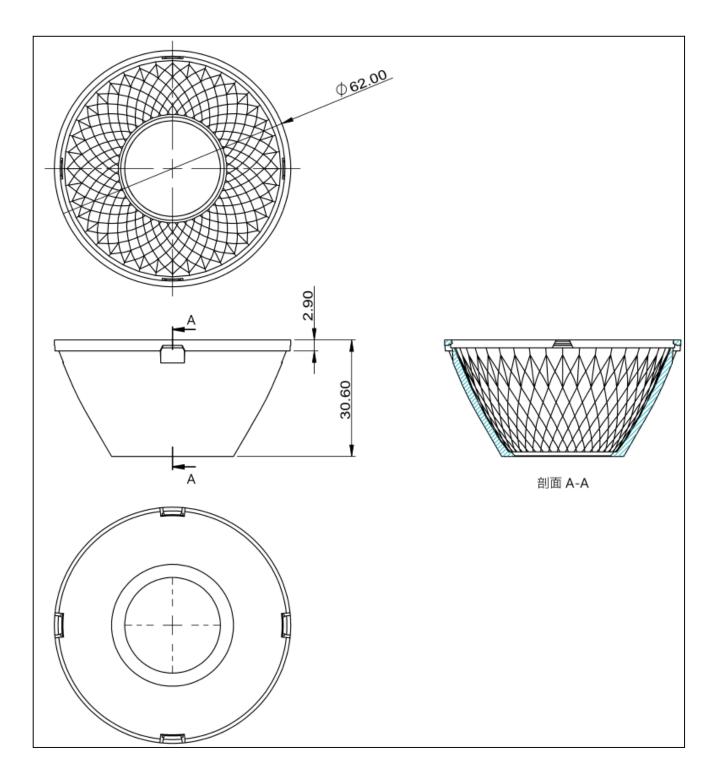


SL-A-062B-M

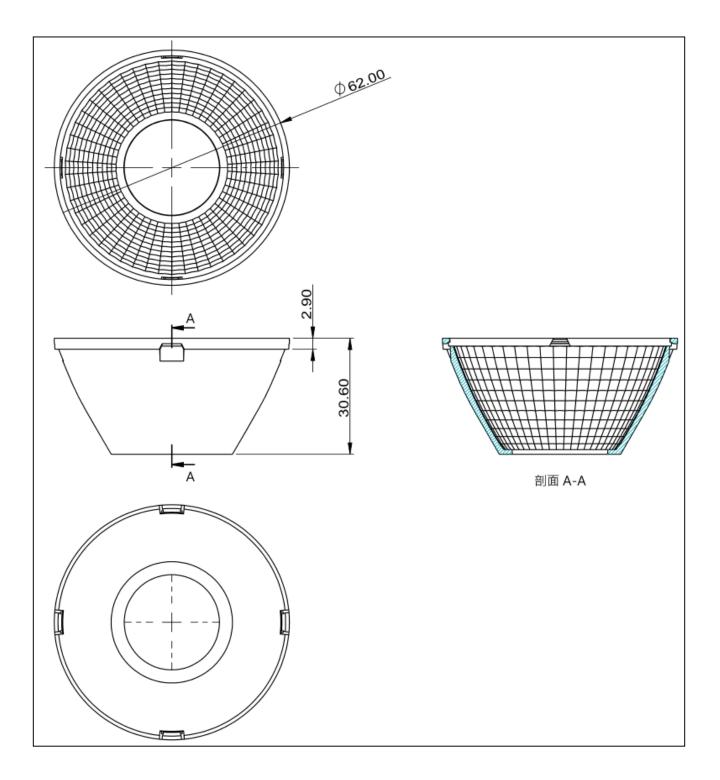

SL-A-062B-L

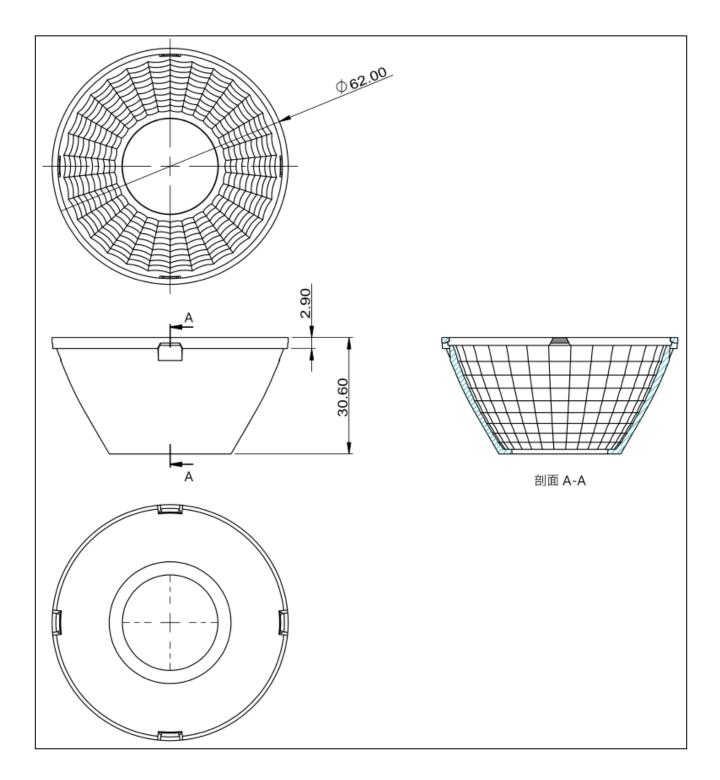

SL-A-062B-LENS

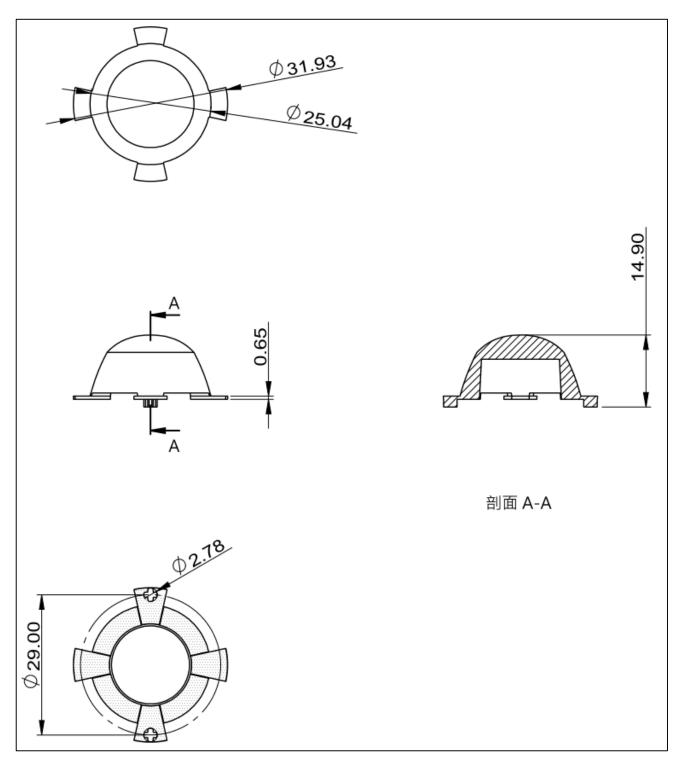


Shinland


Distribution Curve Flux

Source:Cree CXA1507

SL-A-062B-S

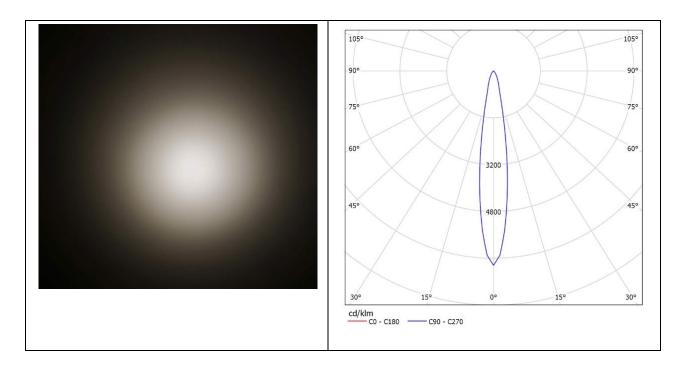


SL-A-062B-M

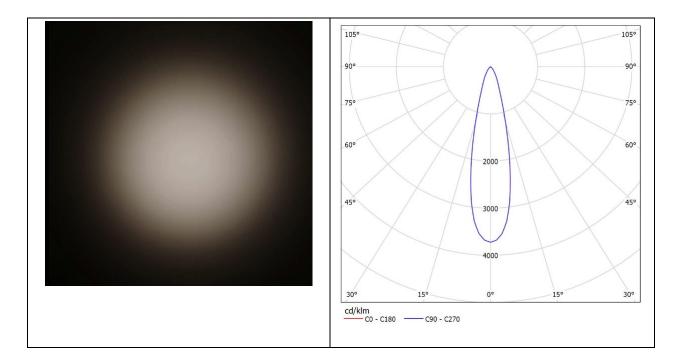



SL-A-062B-L

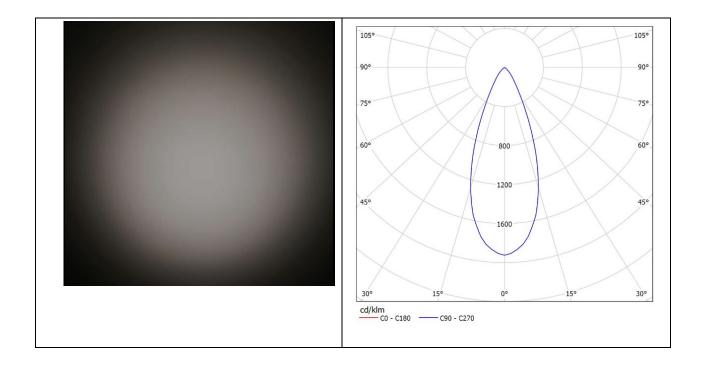

Notes

- It is not allowed to scrub the reflective surface. If there is dust on the surface, please clean by soft cotton with little water.
- It is forbidden to clean with industrial solvent such as ethanol.
- Storage temperature: 0°C-40°C, and humidity:30%-95%.
- Recommended operating temperature (PC) is <100°C.
- Keep reflector in package to void the dust.
- Prohibit the reflector touch with acid or alkaline solvent.



About Shinland

Shenzhen Shinland Co. Ltd, one of the longest and most professional company in reflector field, have years experience. Different from other factory which only have simple process, all aspects included R&D, making mold, mass production and market support are achieved by our exclusive resources.

Insisting on "Quality First, Service First" and pragmatic, enterprising spirit, building the market by quality, casting our brand by credibility and integrity, Shinland now become the leading supplier of second-optical solution in China.

